




625 Series Coaxial Cable  
Copper Clad Aluminum Conductor  
Foamed Polyethylene Dielectric  
Seamless Aluminum Tube Outer Conductor

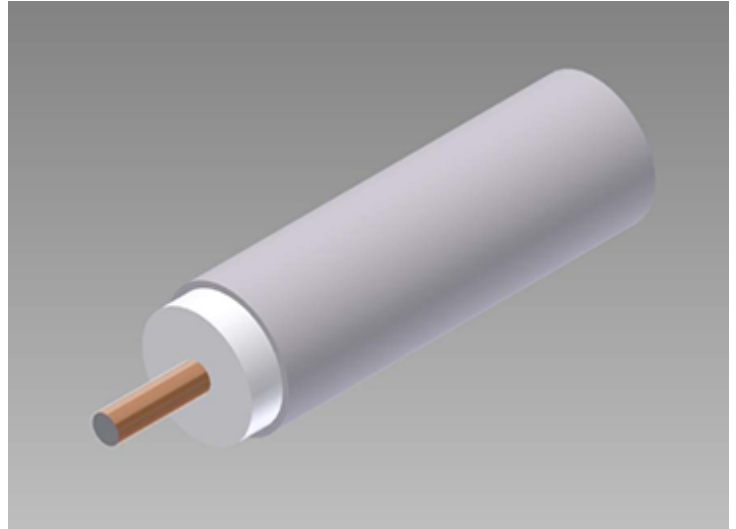

**Cable Ordering Information**

| Part Number          | Description | NEC / CE Listing |
|----------------------|-------------|------------------|
| 750625A000AL00100001 | T10625      |                  |

**Characteristics**

| Material        | Detail                 | inches | mm   |
|-----------------|------------------------|--------|------|
| Inner Conductor | Copper Clad Aluminum   | 0.136  | 3.45 |
| Dielectric      | Foamed Polyethylene    | 0.563  | 14.3 |
| Outer Conductor | Seamless Aluminum Tube | 0.625  | 15.9 |
| Floodant        | ---                    | ---    | ---  |
| Jacket          | ---                    | ---    | ---  |
| Messenger       | ---                    | ---    | ---  |
| Cable Width     | ---                    | ---    | ---  |
|                 | ---                    | ---    | ---  |
|                 | ---                    | ---    | ---  |

**Mechanical Specifications**

|                               |             |     |        |
|-------------------------------|-------------|-----|--------|
| Minimum Bend Radius, in. (mm) |             | 5.0 | ( 127) |
| Product Weight                | (less reel) | 122 | ( 182) |

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t10625\_3.0ghz19.docx  
Revision: 2019-09-04  
Page: 1 of 2

Amphenol Broadband Solutions.  
358 Hall Avenue  
Wallingford, CT 06492  
Toll Free +1-800-677-2288  
Toll +1-434-432-1800  
Fax +1-434-432-1821  
www.timesfiber.com

**uncontrolled copy**  
All Rights Reserved,  
Specifications subject to change without notice



**Electrical Specifications**

|                            |                |               |
|----------------------------|----------------|---------------|
| Impedance, $\Omega$        | 75 $\pm$ 2     |               |
| Velocity of Propagation, % | 87             |               |
| Capacitance, Nominal       | 15.3 pF/ft     | 50.2 pF/m     |
| DC Resistance              | $\Omega$ / kft | $\Omega$ / km |
| Inner Conductor            | 0.86           | 2.82          |
| Outer Conductor            | 0.23           | 0.75          |
| Loop                       | 1.09           | 3.57          |

**Attenuation, Maximum @ 68 °F (20 °C)**

| Frequency, MHz | dB / 100 ft | dB / 100 m |
|----------------|-------------|------------|
| 5              | 0.13        | 0.43       |
| 55             | 0.45        | 1.48       |
| 85             | 0.56        | 1.84       |
| 211            | 0.89        | 2.92       |
| 250            | 0.98        | 3.22       |
| 270            | 1.02        | 3.35       |
| 300            | 1.08        | 3.54       |
| 330            | 1.14        | 3.74       |
| 350            | 1.18        | 3.87       |
| 400            | 1.27        | 4.17       |
| 450            | 1.35        | 4.43       |
| 500            | 1.43        | 4.69       |
| 550            | 1.51        | 4.95       |
| 600            | 1.58        | 5.18       |
| 750            | 1.78        | 5.84       |
| 870            | 1.95        | 6.40       |
| 1002           | 2.07        | 6.79       |
| 1100           | 2.19        | 7.19       |
| 1200           | 2.30        | 7.55       |
| 1218           | 2.32        | 7.61       |
| 1300           | 2.40        | 7.87       |
| 1400           | 2.50        | 8.20       |
| 1625           | 2.61        | 8.56       |
| 1600           | 2.70        | 8.86       |
| 1700           | 2.80        | 9.19       |
| 1794           | 2.89        | 9.48       |
| 1800           | 2.90        | 9.51       |
| 2000           | 3.07        | 10.07      |
| 2200           | 3.25        | 10.66      |
| 2400           | 3.41        | 11.19      |
| 2600           | 3.58        | 11.75      |
| 2800           | 3.74        | 12.27      |
| 3000           | 3.89        | 12.76      |

**Structural Return Loss**

|     |        |     |
|-----|--------|-----|
| MHz |        | dB  |
|     | 5-1002 | -30 |

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t10625\_3.0ghz19.docx  
Revision: 2019-09-04  
Page: 2 of 2

**uncontrolled copy**

All Rights Reserved,  
Specifications subject to change without notice

Amphenol Broadband Solutions.  
358 Hall Avenue  
Wallingford, CT 06492  
Toll Free +1-800-677-2288  
Toll +1-434-432-1800  
Fax +1-434-432-1821  
www.timesfiber.com