




875 Series Coaxial Cable  
Copper Clad Aluminum Conductor  
Foamed Polyethylene Dielectric  
Seamless Aluminum Tube Outer Conductor  
Underground Floodant  
Medium Density Polyethylene Jacket  
Steel Armor Tape [Helically Applied]  
Underground Floodant  
Medium Density Polyethylene Jacket

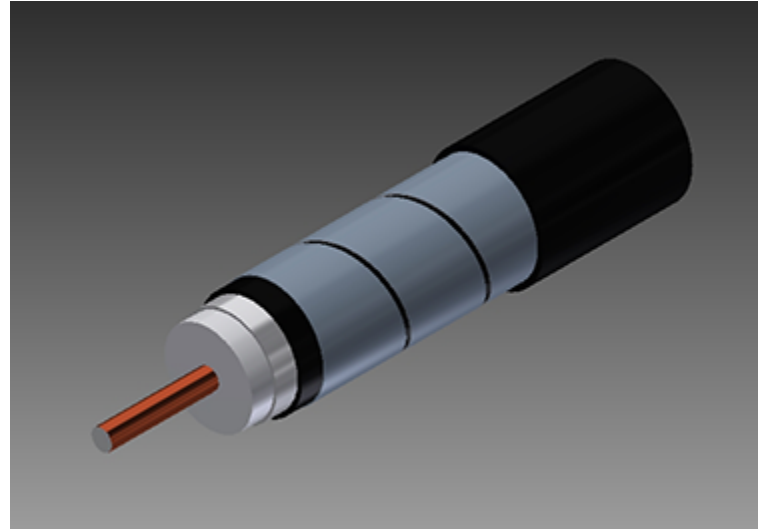

**Cable Ordering Information**

Part Number	Description	NEC / CE Listing
750875JBA0BK00100001	T10875JBA	

**Characteristics**

Material	Detail	inches	mm
Inner Conductor	Copper Clad Aluminum	0.194	4.93
Dielectric	Foamed Polyethylene	0.797	20.2
Outer Conductor	Seamless Aluminum Tube	0.875	22.2
Floodant	Underground	---	---
Jacket	Polyethylene, Outdoor, Black	0.955	24.3
Armor	Steel Tape, Helical	0.975	24.8
Floodant	Underground	---	---
Jacket (outer)	Polyethylene, Outdoor, Black	1.075	27.3
	---	---	---

**Mechanical Specifications**

Minimum Bend Radius, in. (mm)		15.0	( 381)
Product Weight	(less reel)	432	( 643)

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t10875jba\_3.0ghz19.docx  
Revision: 2019-09-04  
Page: 1 of 2

Amphenol Broadband Solutions.  
358 Hall Avenue  
Wallingford, CT 06492  
Toll Free +1-800-677-2288  
Toll +1-434-432-1800  
Fax +1-434-432-1821  
www.timesfiber.com

**uncontrolled copy**

All Rights Reserved,  
Specifications subject to change without notice



**Electrical Specifications**

Impedance, $\Omega$	75 $\pm$ 2	
Velocity of Propagation, %	87	
Capacitance, Nominal	15.3 pF/ft	50.2 pF/m
DC Resistance	$\Omega$ / kft	$\Omega$ / km
Inner Conductor	0.42	1.38
Outer Conductor	0.13	0.43
Loop	0.55	1.81

**Structural Return Loss**

MHz		dB
	5-1002	-30

**Attenuation, Maximum @ 68 °F (20 °C)**

Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.09	0.30
55	0.32	1.05
85	0.40	1.31
211	0.64	2.10
250	0.70	2.30
270	0.73	2.40
300	0.78	2.56
330	0.82	2.69
350	0.84	2.76
400	0.91	2.99
450	0.97	3.18
500	1.03	3.38
550	1.09	3.58
600	1.14	3.74
750	1.29	4.23
870	1.41	4.63
1002	1.53	5.02
1100	1.61	5.28
1200	1.69	5.54
1218	1.71	5.61
1300	1.76	5.77
1400	1.84	6.04
1625	1.93	6.33
1600	2.01	6.59
1700	2.05	6.73
1794	2.12	6.96
1800	2.13	6.99
2000	2.29	7.51
2200	2.43	7.97
2400	2.56	8.40
2600	2.69	8.83
2800	2.81	9.22
3000	2.92	9.58

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t10875jba\_3.0ghz19.docx  
Revision: 2019-09-04  
Page: 2 of 2

**uncontrolled copy**

All Rights Reserved,  
Specifications subject to change without notice

Amphenol Broadband Solutions.  
358 Hall Avenue  
Wallingford, CT 06492  
Toll Free +1-800-677-2288  
Toll +1-434-432-1800  
Fax +1-434-432-1821  
www.timesfiber.com