




Series 6 Coaxial Cable
Copper Clad Steel Conductor
Foamed Polyethylene Dielectric
Bonded APA Laminate Shield
77% Aluminum Braid
Moisture Inhibiting lifeTime®
APA Laminate Shield (ShieldX®)
Black PVC Jacket
NEC 820 CATV Listed

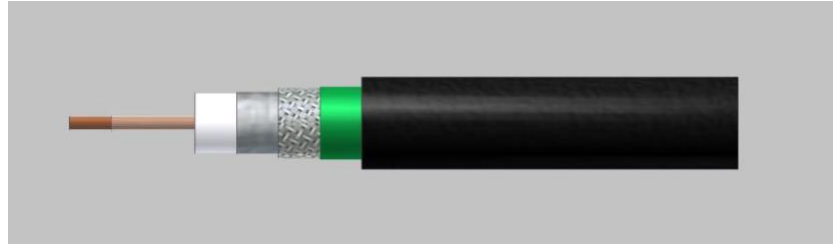

Designed for enhanced shielding, targeting today's LTE interference problems...

Cable Ordering Information

Part Number	Description	NEC / CSA Listing
006277V04BK0310000R1	T6TSFx77-LTV (CATV) Black	NEC 820 CATV

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Steel	0.0403	1.02
Dielectric	Foamed Polyethylene	0.180	4.57
1 st Outer Conductor	Sealed APA Tape	0.188	4.78
2 nd Outer Conductor	77% Aluminum Braid	0.212	5.38
3 rd Outer Conductor	APA Tape (ShieldX®)	0.216	5.49
Floodant	Moisture Inhibiting lifeTime®	---	---
Jacket	PVC, Flame Retardant, Black	0.278	7.06
Twisted Pairs	---	---	---
Messenger	---	---	---

Mechanical Specifications

Minimum Bend Radius, in. (mm)		1.0	(25.40)
Product Weight	(less reel)	30 lbs /kft	

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Amphenol Broadband Solutions
358 Hall Avenue
Wallingford, CT 06492
Toll Free +1-800-677-2288
Toll +1-434-432-1800
Fax +1-434-432-1821
www.timesfiber.com

Document: t6tsfx77-ltv (catv) black_1.8ghz18.docx
Revision: 12.12.2018
Page: 1 of 2

uncontrolled copy
All Rights Reserved,
Specifications subject to change without notice

Electrical Specifications		
Impedance, Ω	75 \pm 3	
Velocity of Propagation, %	85	
Capacitance, Nominal	16.2 pF/ft	53.2 pF/m
DC Resistance	Ω / kft	Ω / km
Inner Conductor	31.0	102
Outer Conductor	5.70	19
Loop	36.7	120

Attenuation, Maximum @ 68 °F (20 °C)		
Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.58	1.90
55	1.60	5.25
211	3.05	10.01
250	3.30	10.83
270	3.37	11.06
300	3.55	11.65
330	3.74	12.27
350	3.85	12.63
400	4.15	13.62
450	4.40	14.44
500	4.66	15.29
550	4.90	16.08
600	5.10	16.73
750	5.65	18.54
870	6.11	20.05
1000	6.55	21.49
1100	6.87	22.54
1200	7.18	23.56
1218	7.21	23.65
1300	7.47	24.51
1400	7.75	25.43
1500	8.06	26.44
1600	8.34	27.36
1700	8.61	28.25
1794	8.85	29.04
1800	8.87	29.10

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t6tsfx77-ltv (catv) black_1.8ghz18.docx
 Revision: 12.12.2018
 Page: 2 of 2

Amphenol Broadband Solutions
 358 Hall Avenue
 Wallingford, CT 06492
 Toll Free +1-800-677-2288
 Toll +1-434-432-1800
 Fax +1-434-432-1821
www.timesfiber.com

uncontrolled copy
 All Rights Reserved,
 Specifications subject to change without notice