


Series 6 Coaxial Cable  
Copper Clad Steel Conductor  
Foamed Polyethylene Dielectric  
Bonded APA Laminate Shield  
77% Aluminum Braid  
Underground Floodant  
APA Laminate Shield (ShieldX®)  
Orange Polyethylene Jacket

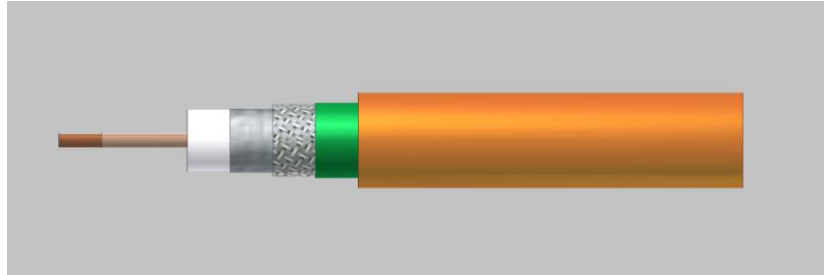

*Designed for enhanced shielding, targeting today's LTE interference problems...*

**Cable Ordering Information**

Part Number	Description	NEC / CSA Listing
006277E00OR0610000R1	T6TSFx77-FE Orange	None

**Characteristics**

Material	Detail	inches	mm
Inner Conductor	Copper Clad Steel	0.0403	1.02
Dielectric	Foamed Polyethylene	0.180	4.57
1 <sup>st</sup> Outer Conductor	Sealed APA Tape	0.188	4.78
2 <sup>nd</sup> Outer Conductor	77% Aluminum Braid	0.212	5.38
3 <sup>rd</sup> Outer Conductor	APA Tape (ShieldX®)	0.216	5.49
Floodant	Underground	---	---
Jacket	Polyethylene, Orange	0.278	7.06
Twisted Pairs	---	---	---
Messenger	---	---	---

**Mechanical Specifications**

Minimum Bend Radius, in. (mm)		1.0	( 25.40)
Product Weight	(less reel)	25 lbs /kft	

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Amphenol Broadband Solutions  
358 Hall Avenue  
Wallingford, CT 06492  
Toll Free +1-800-677-2288  
Toll +1-434-432-1800  
Fax +1-434-432-1821  
www.timesfiber.com

Document: t6tsfx77-fe orange\_1.8ghz18.docx  
Revision: 12.12.2018  
Page: 1 of 2

**uncontrolled copy**  
All Rights Reserved,  
Specifications subject to change without notice

Electrical Specifications		
Impedance, $\Omega$	75 $\pm$ 3	
Velocity of Propagation, %	85	
Capacitance, Nominal	16.2 pF/ft	53.2 pF/m
DC Resistance	$\Omega$ / kft	$\Omega$ / km
Inner Conductor	31.0	102
Outer Conductor	5.70	19
Loop	36.7	120

Attenuation, Maximum @ 68 °F (20 °C)		
Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.58	1.90
55	1.60	5.25
211	3.05	10.01
250	3.30	10.83
270	3.37	11.06
300	3.55	11.65
330	3.74	12.27
350	3.85	12.63
400	4.15	13.62
450	4.40	14.44
500	4.66	15.29
550	4.90	16.08
600	5.10	16.73
750	5.65	18.54
870	6.11	20.05
1000	6.55	21.49
1100	6.87	22.54
1200	7.18	23.56
1218	7.21	23.65
1300	7.47	24.51
1400	7.75	25.43
1500	8.06	26.44
1600	8.34	27.36
1700	8.61	28.25
1794	8.85	29.04
1800	8.87	29.10

Customers are reminded that they are SOLELY responsible for confirming that all products are properly installed and used in accordance with all applicable codes and regulations.

Document: t6tsfx77-fe orange\_1.8ghz18.docx  
 Revision: 12.12.2018  
 Page: 2 of 2

Amphenol Broadband Solutions  
 358 Hall Avenue  
 Wallingford, CT 06492  
 Toll Free +1-800-677-2288  
 Toll +1-434-432-1800  
 Fax +1-434-432-1821  
[www.timesfiber.com](http://www.timesfiber.com)

**uncontrolled copy**

All Rights Reserved,  
 Specifications subject to change without notice